



WINDPOINTE V2 XL | 80" / 70"



NEW FOR AU  **POWERFUL MOTOR**

203 cm (80") Blade span 101 RPM 79 W Energy usage

178 cm (70") Blade span 130 RPM 79 W Energy usage

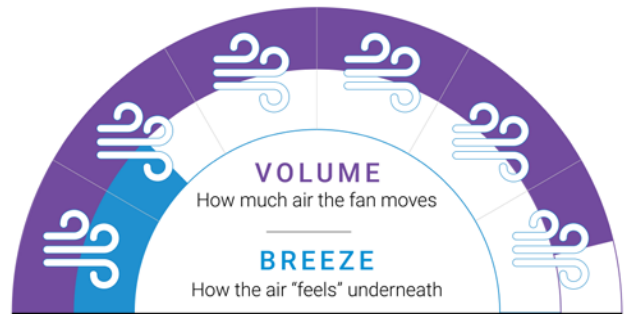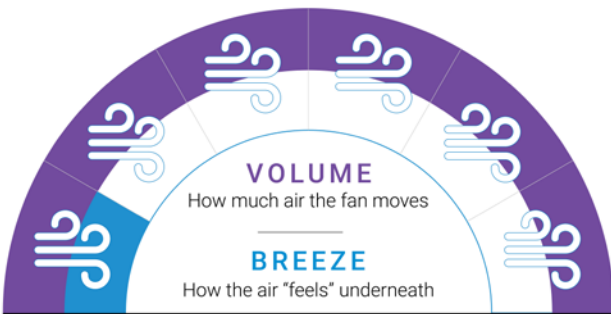

FAN PERFORMANCE

FAN PERFORMANCE

Fan Speed (H/M/L)	101 / 80 / 54 RPM
Energy usage (H/M/L)	79 / 62 / 44 W
Airflow volume (H)	14,092 m ³ / hr
Efficiency (H)	178 m ³ / hr / W


Fan Speed (H/M/L)	130 / 105 / 73 RPM
Energy usage (H/M/L)	79 / 62 / 44 W
Airflow volume (H/M/L)	12,887 m ³ / hr
Efficiency (H/M/L)	163 m ³ / hr / W

The Fan Performance Rating is a guide to show customer's how much air the fan moves as well as how the airflow "feels" when you stand underneath. This is a guide only. Refer to our website for more information.

- + The new and improved Windpointe motor has been tuned to provide up to a 30% performance increase, now includes a wall control as standard and is available in three premium finishes
- + The large all-weather curved blades provide an impressive surface area and are effective at moving high volumes of air

- + Ideal for large, enclosed living spaces where sweeping air circulation is desired and high velocity (wind chill) cooling is not required
- + For those times when you need your fan to also be a light, the Windpointe now has a new 12W LED light kit option

Fan Dimensions per Downrod			
For ceilings	Downrod (∅26 mm)	A	B
2.4m – 3m	15 cm (6 inch) *	37 cm	47 cm
3m – 4m	90 cm (36 inch) #	112 cm	122 cm
4m – 5.5m	180 cm (72 inch) #	202 cm	212 cm
Light Kit increases A by 7 cm			

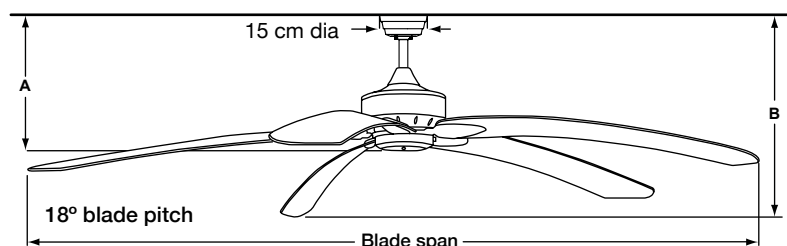

BW80 203 cm (80 inch) **BW70** 178 cm (70 inch)

Net hanging weight: 12 kg

THREE YEAR | **ONSITE WARRANTY**

* Standard downrod included with fan. # Optional downrod available for purchase.

Plated

Powder Coated

Motor finish



Brushed Nickel
MW75BN



Matte White
MW75MW



Oil-rubbed Bronze
MW75OB

Location

Suitable for indoor use only

Suitable for indoor and damp (outdoor undercover) locations

Motor

- Powerful 188 x 25mm motor for optimal performance with this fan
- High quality bearings and copper wiring for reliable operation and improved efficiency
- Strict quality control levels, critical sound level requirements and strenuous motor assembly procedures ensures quiet, efficient operation

Blades & Span



Cherry
BW80CY
BW70CY



Mahogany
BW80MH
BW70MH



Maple
BW80MP
BW70MP



Matte White
BW80MW
BW70MW



Teak
BW80TK
BW70TK

203cm (80 inch)
178cm (70 inch)

- All-weather blades are available in two large lengths – for a blade span of 80” or 70” – and designed for high volume, low velocity cooling
- 18° effective blade pitch for optimal airflow
- All blades are balanced and set-matched to reduce wobble
- Blades are moulded from UV resistant all-weather polymer to withstand the elements

Mounting

- Hanging ball and bracket design allows for up to 30° slope

	Brushed Nickel	Matte White	Oil-rubbed Bronze
90cm (36 inch)	DR1-36BN	DR1-36MW	DR1-36OB
180cm (72 inch)	DR1-72BN	DR1-72MW	DR1-72OB

Controls



Three-speed remote control (fan and light) with optional dimmer
RC4



fanSync Bluetooth remote control (fan and light) with dimming
RC9

LED Light Kit

Power: 12W
Lumen: 1100
CCT: 3000K



Brushed Nickel
LM22BN

Matte White
LM22WH

Oil-rubbed Bronze
LM22OB